



Tie Rack
Operating Instructions
Model # ST-72



Read all instructions carefully before using this item


Assembly

- A. Tie Rack Body (1)
- B. Tie Rack Cover (1)
- C. Belt Hooks (4)
- D. Large Screws (2)
- E. Small Screws (2)
- F. Battery Lid

A. Place batteries in battery compartment according to indications and replace battery lid (F).


B. Insert the belt hooks (C) into their designated slots, and twist to the left to tighten

C. Choose a space for your rack on your closet rod. With the light facing front, place the rack body(A) on the bottom of your rod and the rack cover(B) directly over it. Depending on your closet rod, choose either the small or large screws to secure. Tighten screws by hand

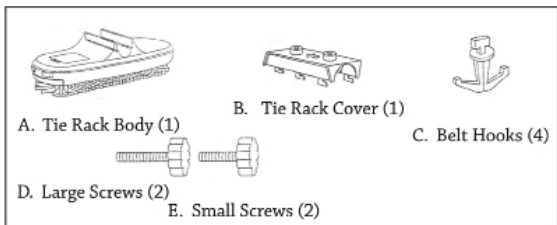

Operation

- A. Press either the right or left button on the front of the tie rack. The lamp will light up, and the rack will start revolving.
- B. Press the button again to stop the movement. The buttons should be centered and balanced in order for movement to stop.
- C. To replace bulb, insert a flat in the tiny gap between the bulb cover and body of the machine. Slip bulb cover off. Change the bulb and place back the cover.

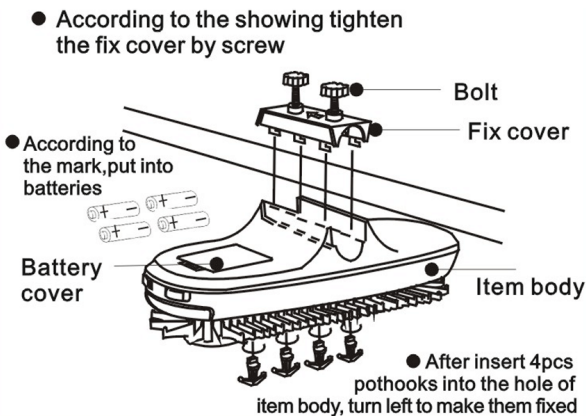

Warranty

This product has a warranty for 6 months from provable date of purchase against defects in material and workmanship.

During this period such defects will be repaired, or the product will be replaced at no charge.

This warranty does not cover damage caused by misuse, negligence or improper installation. Warranty is also invalid in any case that the product is taken apart or serviced by an unauthorized service station.

TO CLAIM

Send your package postage prepaid with a copy of your proof of purchase. You should enclose a letter explaining the nature of your difficulty in detail. Please allow 2-4 weeks for return shipping.



SMARTEK
USA INC

Distributed By:
Smartek USA Inc
www.smartekusa.com